


# Teensy 4.0

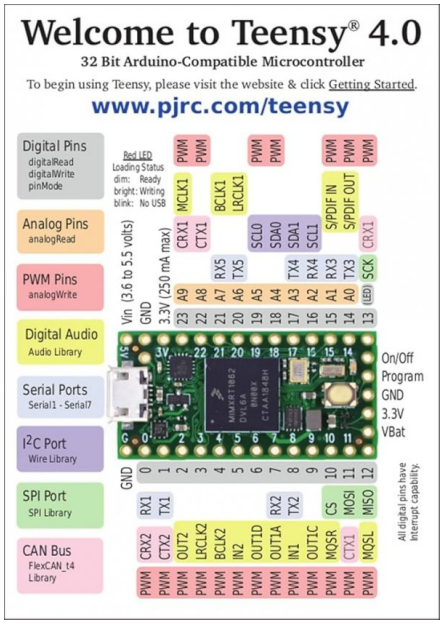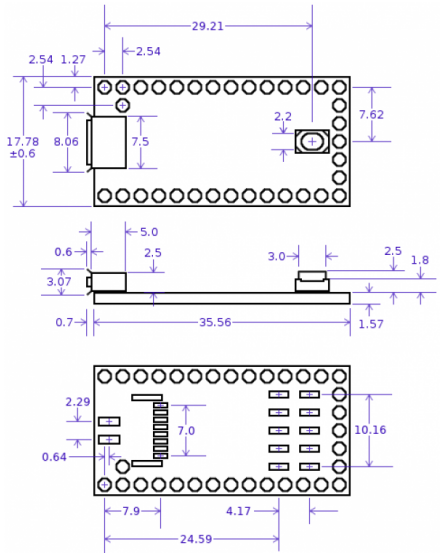


Welcome to Teensy® 4.0
32 Bit Arduino-Compatible Microcontroller
To begin using Teensy, please visit the website & click Getting Started.
www.pjrc.com/teensy
Digital Pins
digitalRead
digitalWrite
pinMode
Analog Pins
analogRead
PWM Pins
analogWrite
Digital Audio
Audio Library
Serial Ports
Serial1 - Serial7
I2C Port
Wire Library
SPI Port
SPI Library
CAN Bus
FlexCAN_t4
Library
Red LED
Loading Status
dim: Ready
bright: Writing
blink: No USB
Vin (3.6 to 5.5 volts)
GND
3.3V (250 mA max)
On/Off
Program
GND
3.3V
VBat
All digital pins have interrupt capability.


29.21
2.54
2.54
1.27
17.78
±0.6
8.06
7.5
2.2
7.62
5.0
0.6
2.5
3.0
2.5
1.8
3.07
0.7
35.56
1.57
2.29
0.64
7.0
10.16
7.9
4.17
24.59

Article extrait de : http://www.lesporteslogiques.net/wiki/ - **WIKI Les Portes Logiques**
Adresse : **http://www.lesporteslogiques.net/wiki/materiel/teensy-4?rev=1746193207**
Article mis à jour: **2025/05/02 15:40**