


Teensy 4.0



Welcome to Teensy® 4.0
32 Bit Arduino-Compatible Microcontroller


To begin using Teensy, please visit the website & click [Getting Started](#).
www.pjrc.com/teensy

Digital Pins digitalRead digitalWrite pinMode	Red LED Loading Status dim: Ready bright: Writing blink: No USB	PWM PWM PWM PWM PWM PWM PWM PWM
Analog Pins analogRead	3.3V (250 mA max)	CRX1 CTX1 SCL0 SDA0 SCL1 SDA1 SCL2 SDA2 SCL3 SDA3 SCL4 SDA4 SCL5 SDA5
PWM Pins analogWrite	Win (3.6 to 5.5 volts)	RX5 TX5 TX4 RX4 TX3 RX3 TX2 RX2 TX1 RX1
Digital Audio Audio Library	3.3V GND	SPDIF IN SPDIF OUT CRX3
Serial Ports Serial1 - Serial7	On/Off Program GND 3.3V VBat	
I²C Port Wire Library		
SPI Port SPI Library		
CAN Bus FlexCAN_14 Library		

0 1 2 3 4 5 6 7 8 9 10 11 12

13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51

All digital pins have 100nF capacitor

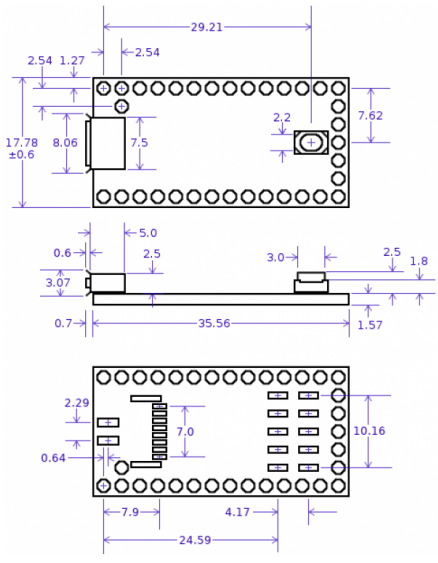

Article extrait de : <http://www.lesporteslogiques.net/wiki/> - **WIKI Les Portes Logiques**
Adresse : <http://www.lesporteslogiques.net/wiki/materiel/teensy-4?rev=1746193207>
Article mis à jour: **2025/05/02 15:40**